

# Learning Glass iC-LGE30 product overview & specifications

Model Part Number:	iC-LGE30
Model Title:	Learning Glass Europe, 30" Mobile Lightboard
Model description:	Learning Glass Europe 30-inch Mobile Lightboard, power supply, dimmers, adjustable legs
Features:	<p>Low-iron tempered glass. Surface treated for improved scratch resistance and easier cleaning</p> <p>Presenter lighting element built into frame (no need for external lights)</p> <p>Internal LED's designed for optimal illumination</p> <p>Internal LED's AND presenter lights have adjustable brightness control for different filming environments</p> <p>Designed to be easily transportable</p> <p>Working surface area: 66cm x 37cm</p> <p>Adjustable height: Min 60cm, Max 67cm</p>
Installation time:	15 minutes



## 1. Introduction

We launched the iC-Learning Glass to enhance the user experience, with the goal to make using our lightboard easier than ever. Our purpose built, integrated, 4K camera (with Sony IMX415 image sensor), works seamlessly with the Learning Glass lightboard, making it easy to create powerful, engaging, lightboard content at the touch of a button. The iC-LGE30 Lightboard features our surface treated, smudge-free, safety glass, ensuring best clarity and optical performance. The working surface area is 66cm x 37cm, and at under 6kg, the unit is easily transportable.

Whether you are a teacher, trainer or business professional, this product can be used at home or in the office with minimal set-up time. At a width of 73.5cm it will rest comfortably on the average desk or table, and with a weight of 6kg is easily transportable. This Lightboard is ideal for users that are looking for a hassle free, 'plug and play' solution as there is no need to set-up and configure your own camera.


The Learning Glass uses best in-class components. Our LED's are a high quality, high density, silicone encased (waterproof) design. They have been tested with over a 100,000-hour lifespan with little to no degradation in performance. All of our Lightboard products have fitted external presenter lighting elements, designed to eliminate the need for any additional lighting whilst filming. This is extremely critical in avoiding light spillage and unwanted reflections. They produce a natural white light operating at 4000K. Both internal and external LED's have dimmer control units using pulse width modulation (PWM) to control brightness. These control units operate at extremely high frequency (12kHz) to avoid any 'flicker effect' that may occur with cameras operating at different frame rates and shutter speeds.

Assembly time is around 15 minutes and requires one person.

## 2. Lightboard Specifications

ELECTRICAL	
Colour Temperature	4000K
CRI Rating	90+
Max Brightness	<4
Viewing Angle	180°
Input Voltage Range	240V
Input Voltage Frequency	50-60Hz
Max Continuous Power	40W
MECHANICAL	
Dimensions with max height	73.5cm x 44.2cm x 3cm
Work Space - Glass surface (cm)	66cm / 37cm
Height Min/Max with legs	60cm / 67cm
Frame Material	High Strength Aluminium
Glass Material	Diamond™ Tempered Glass
Weight (with/without camera attached)	6kg/5kg
Connectors	DC 2.1mm Barrel Jack
ENVIRONMENTAL	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 105°C
Relative Humidity	40% to 95% Electrical

## 4. Lightboard Specifications

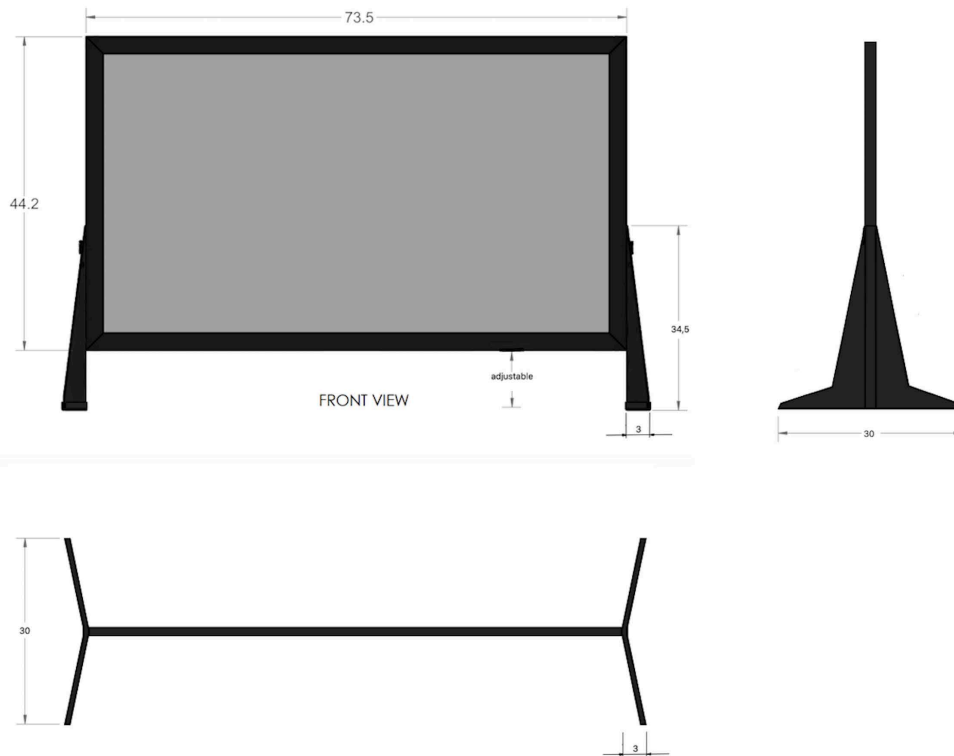

Dimensions in centimetres

## 6. Wiring Block Diagram

### Learning Glass LightGlass Wiring Diagram

